

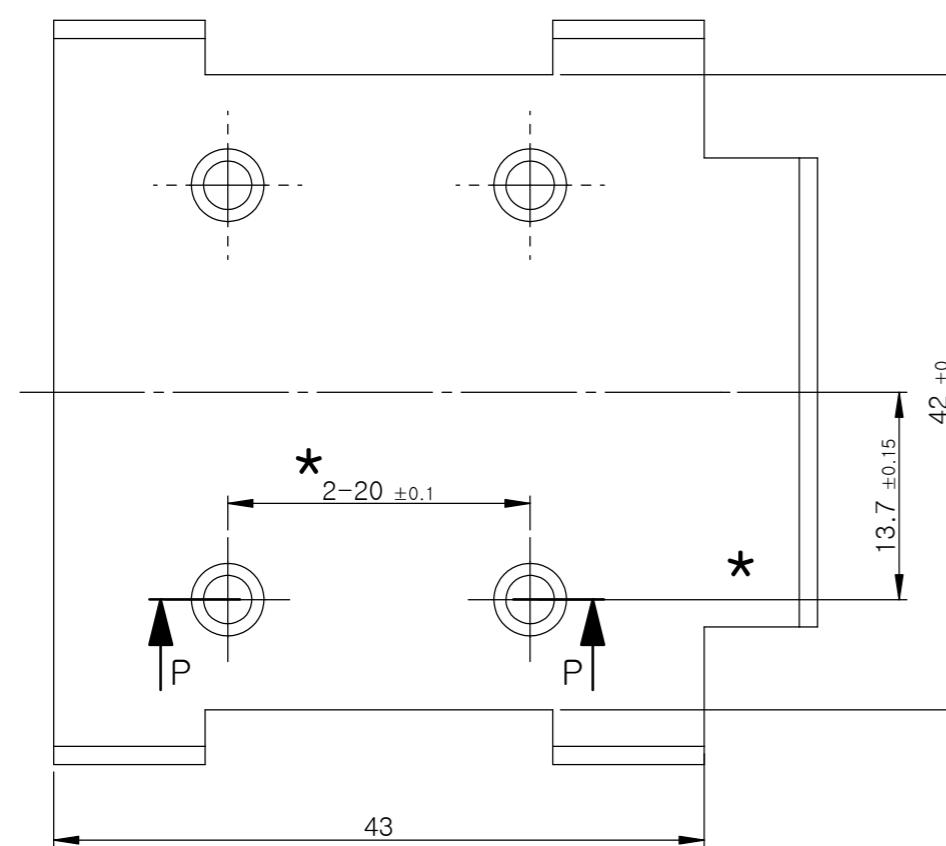


A

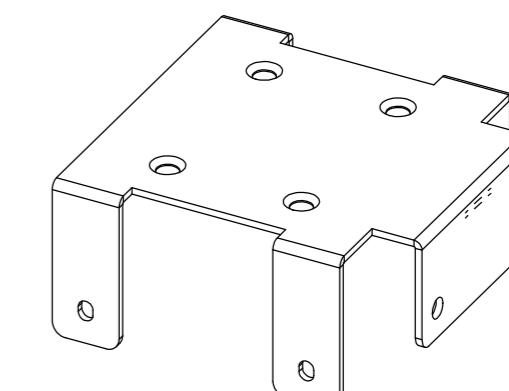


B

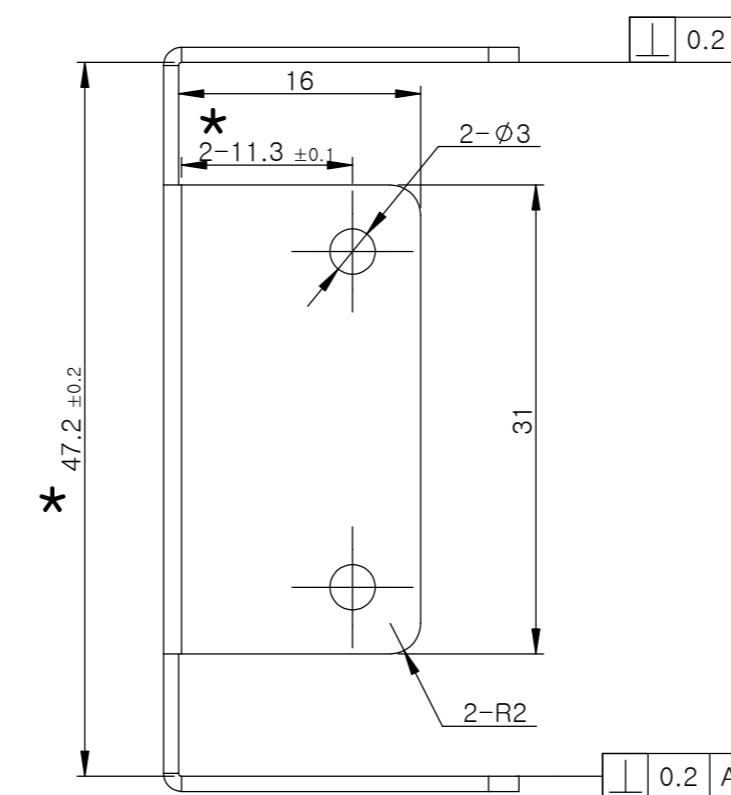


A

C

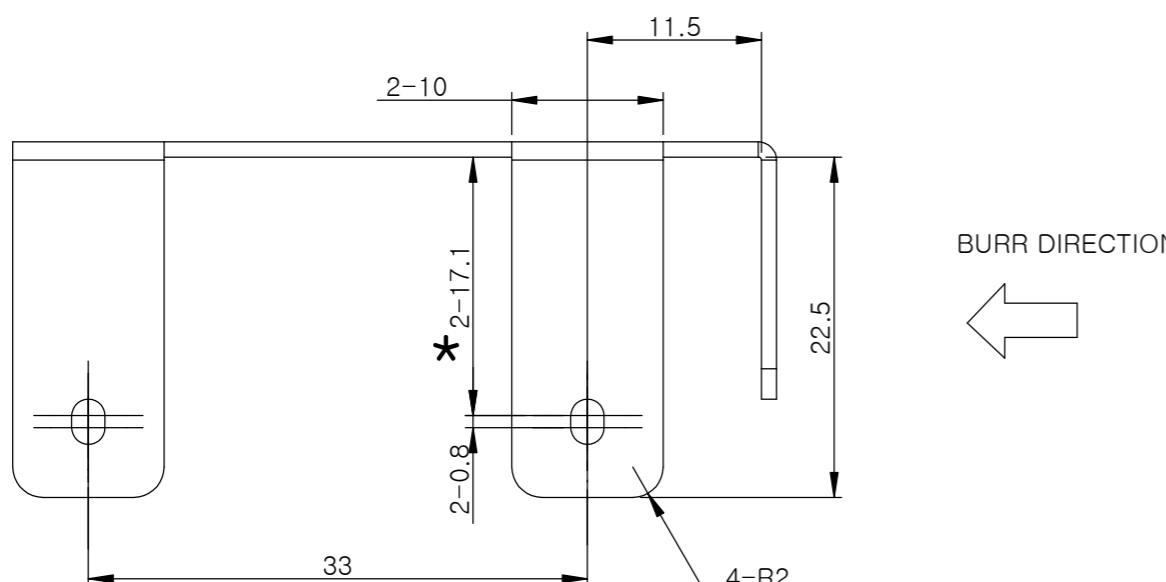

D

D

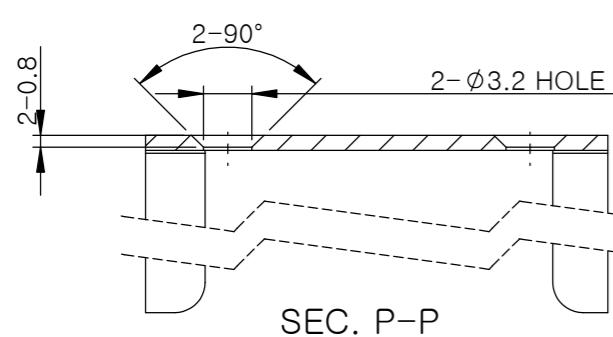

E

E

NOTE :

1. UNLESS OTHERWISE SPECIFIED, GENERAL TOLERANCES ARE:
0 – 20mm : ± 0.1
21 – 50mm : ± 0.2
51 – 100mm : ± 0.3
101 – 150mm : ± 0.4
2. * INDICATES CONTROL DIMENSIONS.
3. BURRS SHALL NOT EXCEED 0.05mm.
ALL BURRS THAT MAY RESULT IN INJURY SHALL BE REMOVED.
4. UNSPECIFIED CORNER RADIUS TO BE R0.1 MAX.
5. UNSPECIFIED INSIDE BENDING RADIUS TO BE R0.3.
6. ALL BENDING DIMENSION TO MEASURE AT THE TANGENT POINT OF THE BENDS.
7. MATERIAL USED AND PARTS PRODUCED MUST COMPLY ROHS REQUIREMENT.
8. SURFACE TO BE FREE FROM SCRATCHES, DIRT AND OIL.

MATERIAL: SUS304 T=1.0

PROCESS: NA

COLOUR: NATURAL

- DO NOT SCALE DRAWING,
- IF IN DOUBT, ASK.
- ALL DIMENSIONS IN mm.

IR ROBOT

(Private and Confidential)
Copyright ©2013PART NAME: BRACKET UPPER
IR-MB05PART NO: IRMIS0010
REV NO: 01

DRAWN: YC KIM

CHK'D:

APPV'D:

SIGNATURE: DATE: 2024.08.26

VOLUME [mm³]:

WEIGHT [gf]:

SCALE 2:1

SHEET 2 OF 2

A3